



NOTE! Pump flange MC2/MC4 is always delivered with a right-rotating pump.



1. Electrically controlled lowering valve
2. P-port. Outlet/return for hydraulic oil.
3. Pressure relief valve (adjustable)
4. Lowering speed valve (adjustable)

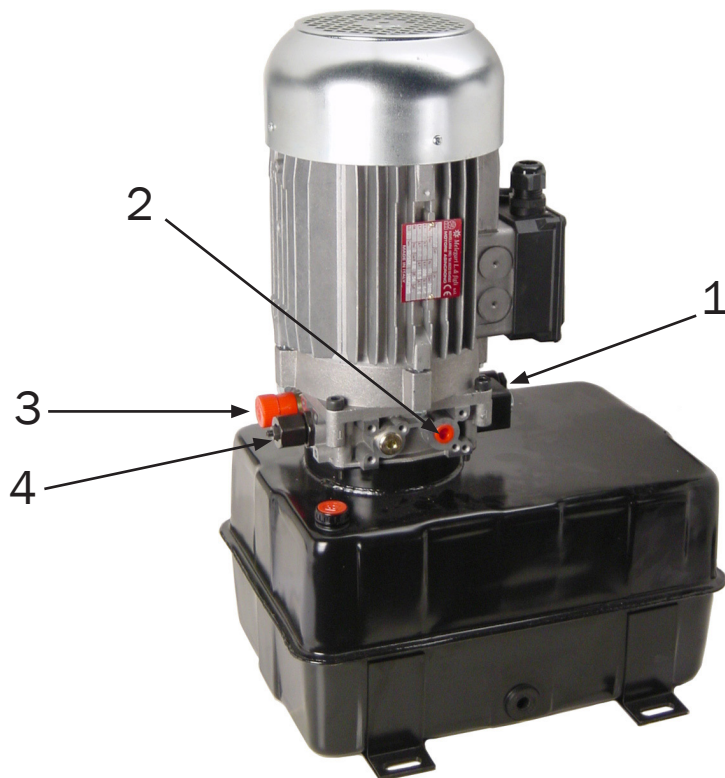

NOTE! Pump flange MC2/MC4 is always delivered with a right-rotating pump.

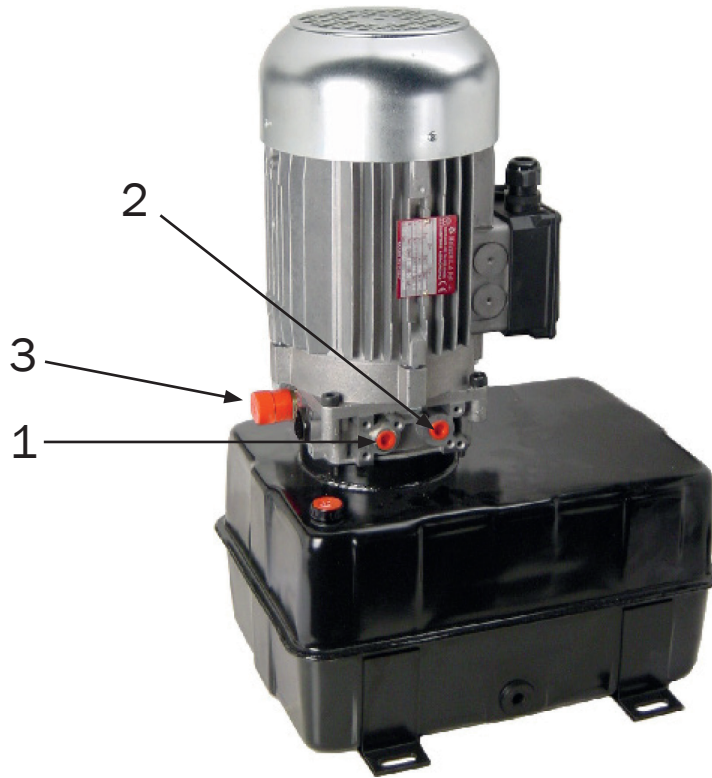

1. T-port. Return to hydraulic tank.
2. P-port. Outlet from pump.
3. Pressure relief valve (adjustable)

The mounting plate for CETOP valves can be fitted over the P and T-port