




Anvisning for 6/2-ventil, sjokkventil

43876 og 43879

ANV128

NO

Styringstrykk P1/P2

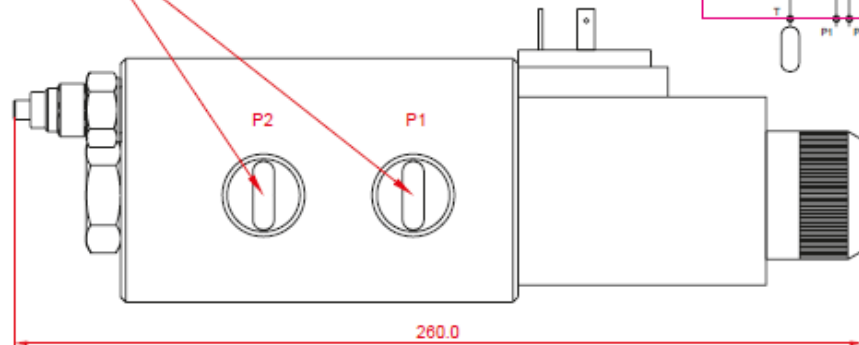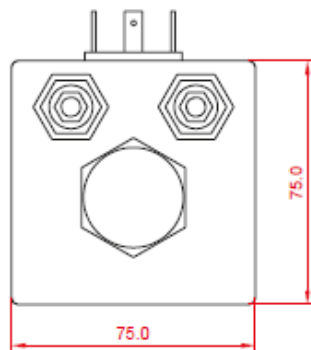


C3 til stempelstangen

C2 til stempelsiden

Trykkakkumulator

M8

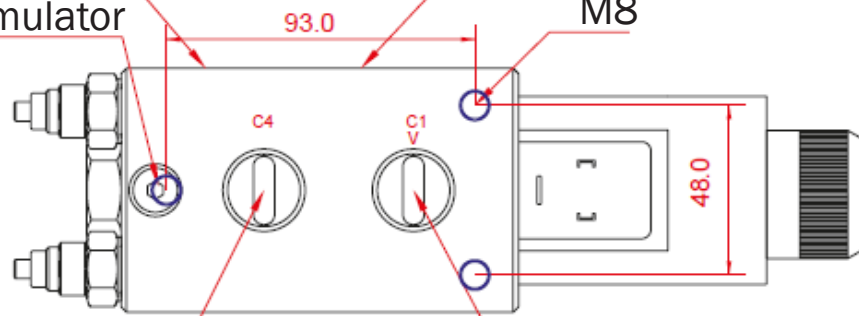

C4 til stempelstangen

C1 til stempelsiden

Gjengetilkobling: R 1/2"
Strømning l/min: 75
Maks. trykk bar: 210
Spennning: 12 VDC/24 VDC



Olsson Parts

Olssons i Ellös AB • Tlf. +46 304-751010
Slätthultsvägen 12 • S-474 31 Ellös
www.olssonparts.com • order@olssonparts.com

2021-11-08