

Loader valve - round pumping without series coupling

49614

ANV186

EN


The installation of the loader valve 49614 in a round pumping system is shown below, without additional components positioned after the valve.

Valve block Walvoil SDM 122/2


Flow:	80 l/min
Max. working pressure P-, A-, B-port:	250 bar
Max. pressure T-port:	10 bar
Connections:	1/2 BSP (T2 - 3/4 BSP)
Ambient temperature:	-20 °C to +80 °C
Recommended oil:	Mineral based
Operation:	Prepared for wire
Pressure relief valve setting	180 bar

Port	Used for
A1	Raise the loader
B1	Lower the loader
A2	Tilt up
B2	Tilt down

T2 alternative tank port

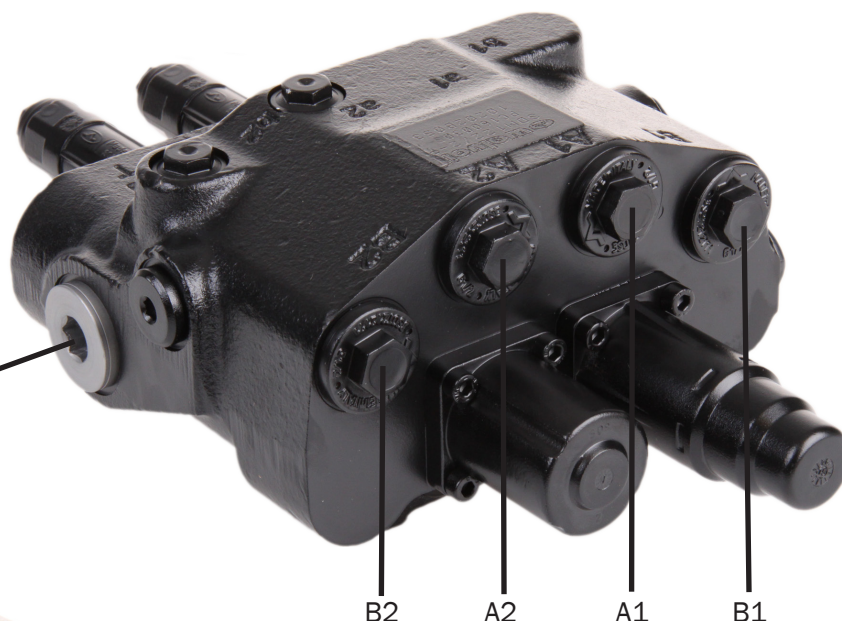

T1 tank port

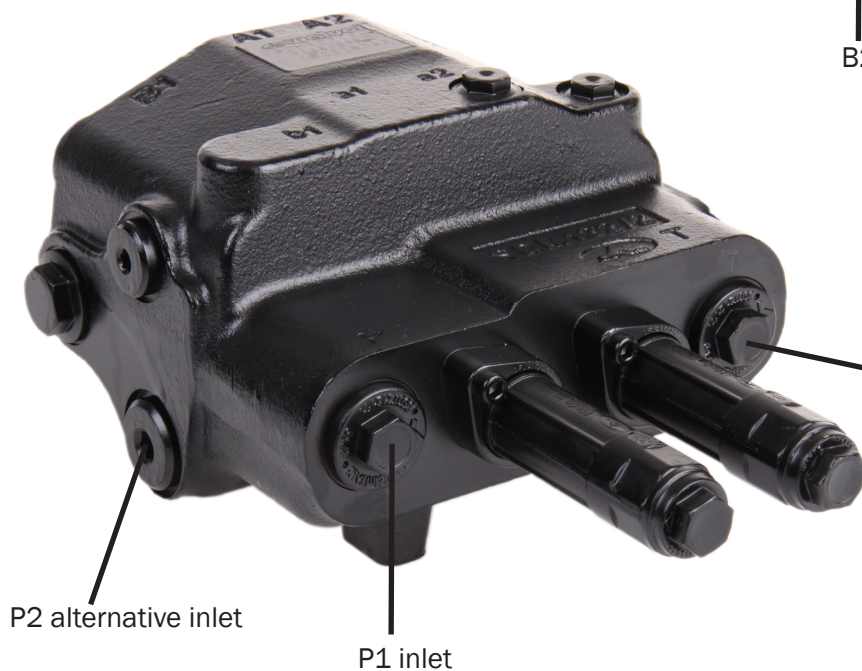

Olsson Parts.

Olssons i Ellös AB • Tel. +46 304-751010
Slätthultsvägen 12 • S-474 31 Ellös
www.olssonparts.com • order@olssonparts.com

2021-11-08