

Loader valve for load sensing system

49615


ANV188

SV


The installation of the loader valve 49615 in a load sensing system is shown below.

Valve block Walvoil DLM 122/2

Flow:	80 l/min
Max. working pressure P-, A-, B-port:	250 bar
Max. pressure T-port:	10 bar
Connections:	1/2 BSP (T2 - 3/4 BSP)
Ambient temperature:	-20 °C to +80 °C
Recommended oil:	Mineral based
Operation:	Prepared for wire
Pressure relief valve setting	180 bar

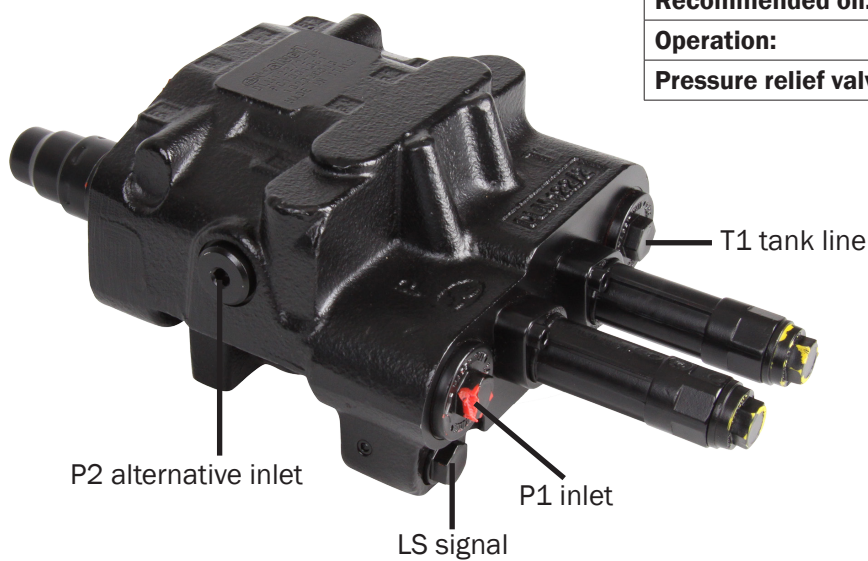

Port	Used for
A1	Raise the loader
B1	Lower the loader
A2	Tilt up
B2	Tilt down

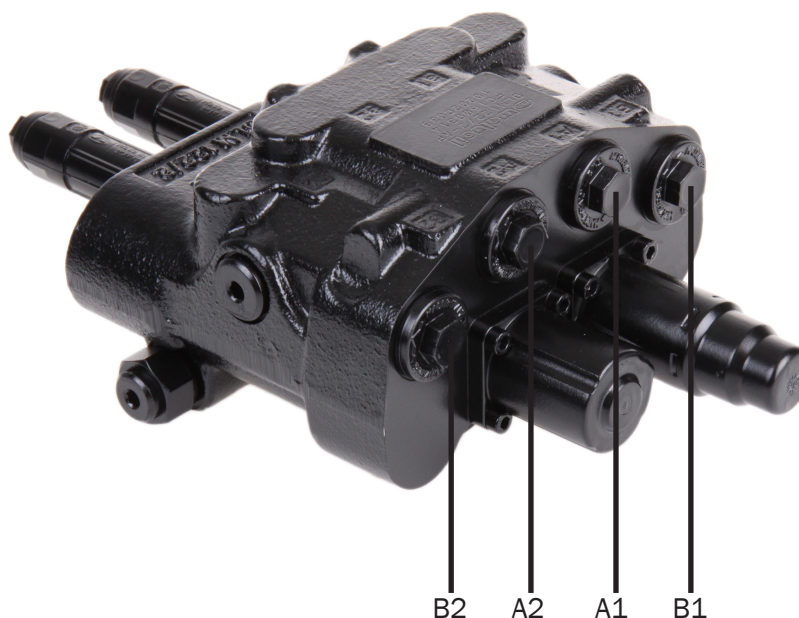

Olssons i Ellös AB • Tfn 0304-751010
Slätthultsvägen 12 • 474 31 Ellös
www.olssonparts.com • order@olssonparts.com

2023-11-10