

Instruction for constant pressure system

45073


ANV203

EN

Valve block:	
Flow:	90 litre/min
Max. pressure:	250 bar
Max counter pressure in return end:	10 bar
Outlet:	1/2" (T 3/4")
Temp. working range:	-15 °C to +80 °C
Filtering:	60-90 µm
Recommended oil:	Mineral-based oil
Operation:	Prepared for wire

For the installation of hydraulic valves, only use sealing washers that seal, not thread sealing tape, string or the like. Make sure you know whether the valve block must be constant pressure connected, series connected or just have a pure return to the tank. Do not confuse these installation methods. If there is a pressure limiter, this must be adjusted to the right pressure.

Port	Used for
A1	Raise the loader
B1	Lower the loader
A2	Tilt up
B2	Tilt down

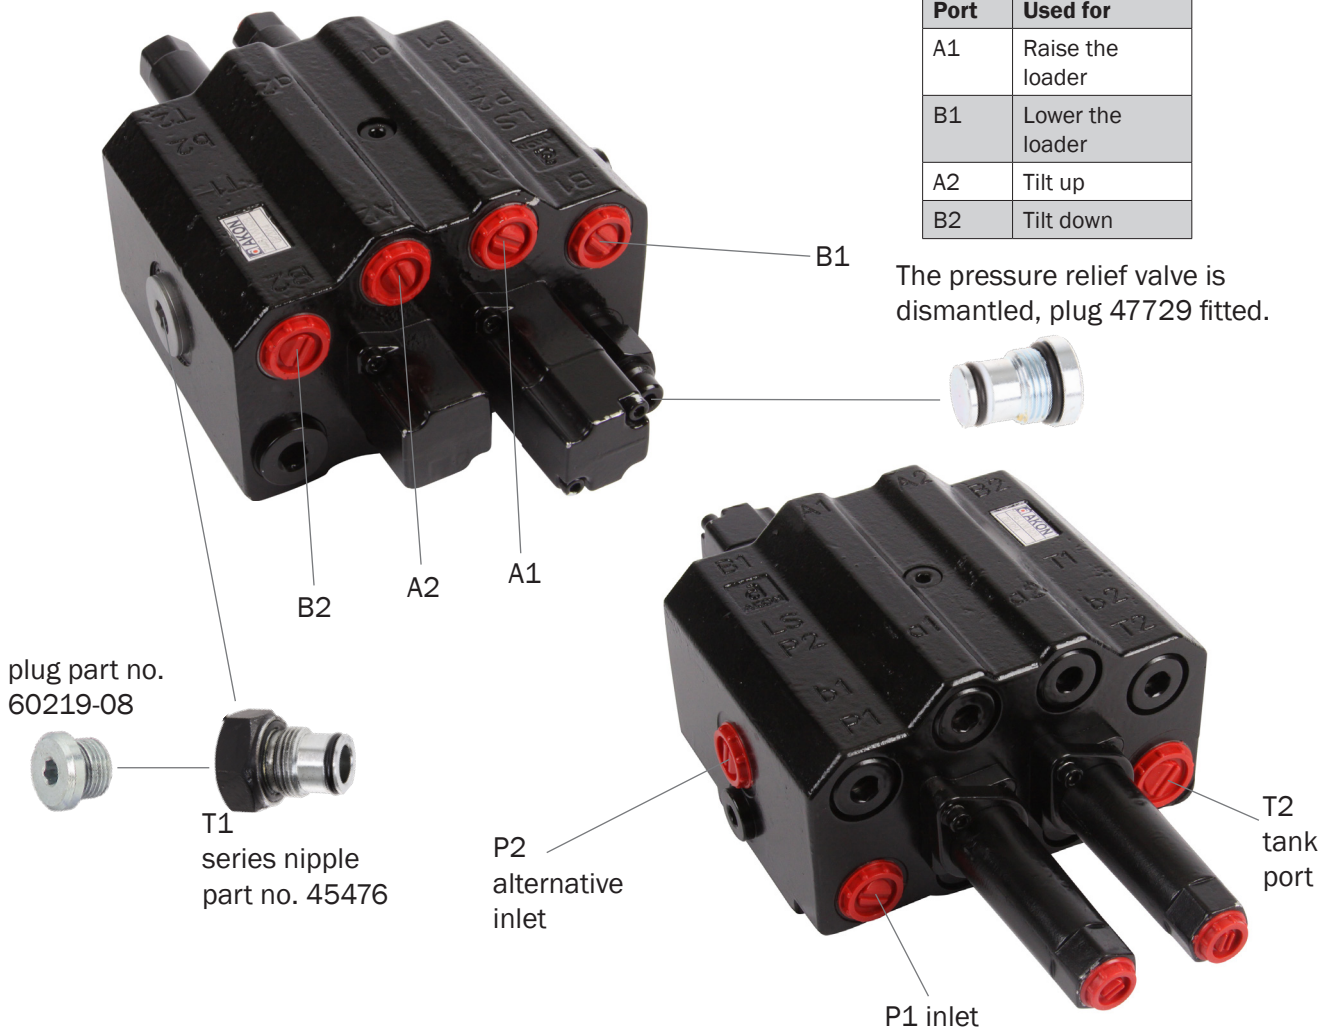

2023-06-07



Olssons i Ellös AB • Tel. +46 304-751010
 Slätthultsvägen 12 • S-474 31 Ellös
 www.olssonparts.com • order@olssonparts.com